

WEIGHING

INSTRUMENTS



SA01 DISPLAY
4 SET POINT RELAYS
ACCURACY: 60,000 DIV.



SD01 DISPLAY
4 SET POINT RELAYS
ACCURACY: 99,999 DIV.



MICRO 43 DISPLAY
KEYBOARD SETTINGS
ACCURACY: 45,000 DIV.



SU01 BATCHER
9 COMPONENTS
ACCURACY: 99,999 DIV.



TL01 WEIGHT LOSS CONTROLLER
PID FLOW REGULATOR
ACCURACY: 99,999 DIV.



TB01 CONTINUOUS BELT WEIGHING
PID - FLOW REGULATOR
ACCURACY: 99,999 DIV.



TX/RX DYNAMOMETER
RADIO TRANSMISSION
12-hour rechargeable battery



TX/RX H DYNAMOMETER
RADIO TRANSMISSION
12-hour rechargeable battery

LOAD CELLS



CENTRAL LOAD CELLS
MODELS CA-CB-CC
Capacities from 3 to 300 Kg




FLEXION LOAD CELLS
MODEL GX
Capacities from 10 to 250 Kg




SHEAR BEAM LOAD CELLS
MODEL FT
Capacities from 10 to 500 Kg



FLEXION LOAD CELLS
MODEL GL
Capacities from 25 to 750 Kg

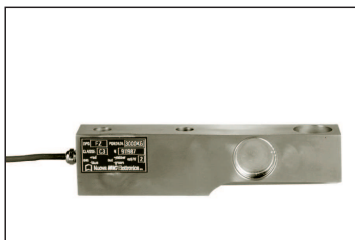


SHEAR BEAM LOAD CELLS
MODEL FX
Capacities from 1000 to 10000 Kg

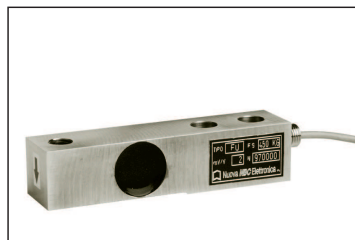


SHEAR BEAM LOAD CELLS
MODEL FB
Capacities from 250 to 500 Kg




TRACTION LOAD CELLS
MODEL ST
Capacities from 100 to 20000 Kg

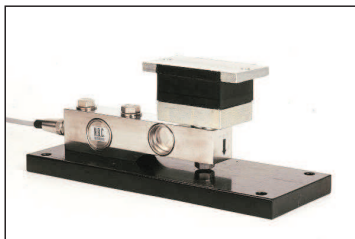

LOAD CELL ACCESSORY
MODEL FX
Capacities from 1000 to 3000 Kg

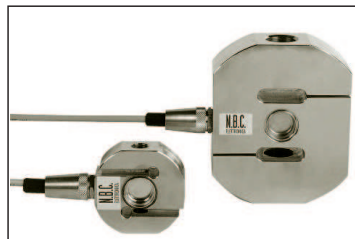

TRACTION LOAD CELLS
MODEL SX
Capacities from 150 to 10000 Kg

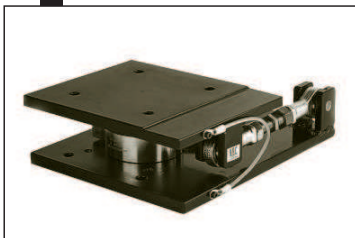

LOAD CELL ACCESSORY
CM
Capacities from 250 to 20000 Kg



COMPRESSION LOAD CELLS
MODEL CM
Capacities from 250 to 50000 Kg



COMPRESSION LOAD CELLS
MODEL CO
Capacities from 5000 to 25000 Kg